



SUPPORT BEAM SYSTEM FOR MOBILE COLUMN LIFTS



MODULAR FOR MAXIMUM FLEXIBILITY IN USE

SHORT BASE SUPPORT BEAM

01




Short base support beam (TS 8.5)

For front and rear lifting. Load capacity 8.5 t,
(L x W x H) 650 x 230 x 140 mm

Short support plate (L x W x H) 605 x 200 x 30 mm,
incl. rubber pad

02

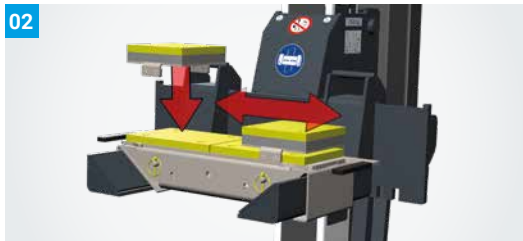

Square support plate

(L x W x H) 200 x 200 x 50 mm,
incl. rubber pad

03



Short extension support beam

Load capacity 8.5 t, (L x W x H) 600 x 200 x 200 mm
incl. rubber pad

03

Extension support beams bridge the dead stroke to the lifting point, thus creating additional lifting height. At the same time, they prevent collisions between vehicle components (e.g. front jacks) and the column lift.

Rubber plates bolted to the support plates and extension support beams enable quick, direct and vehicle-friendly lifting. They also provide a degree of slip resistance.

04



Ball support (K50)


for lifting trailers at the
drawbar

05




Ball support (K80)

for lifting trailers at the
drawbar

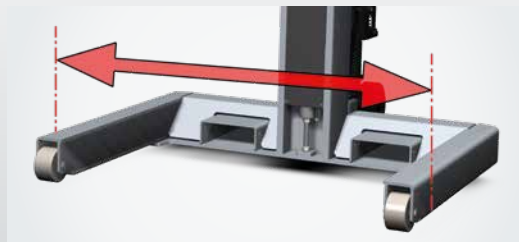


Outer dimensions of column lift chassis


1,150 mm – observe required inner track width on vehicle

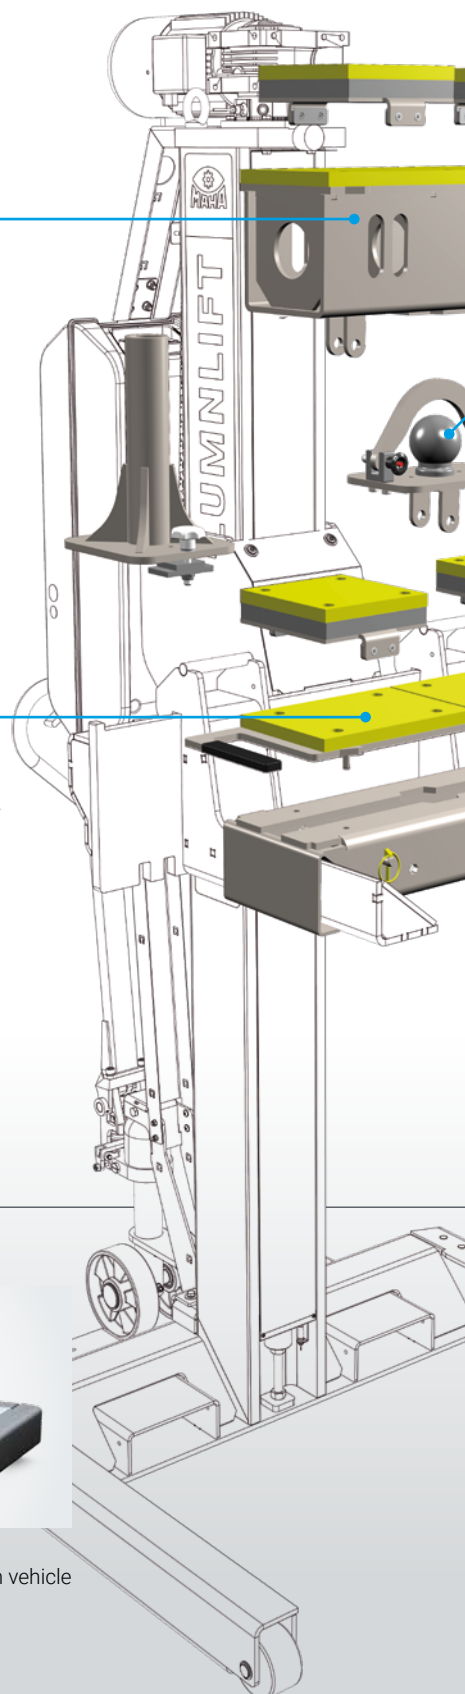

The all-purpose support beam system for mobile column lifts enables the variable use of extension support beams and adapters in a single system – making it unique in its flexibility.

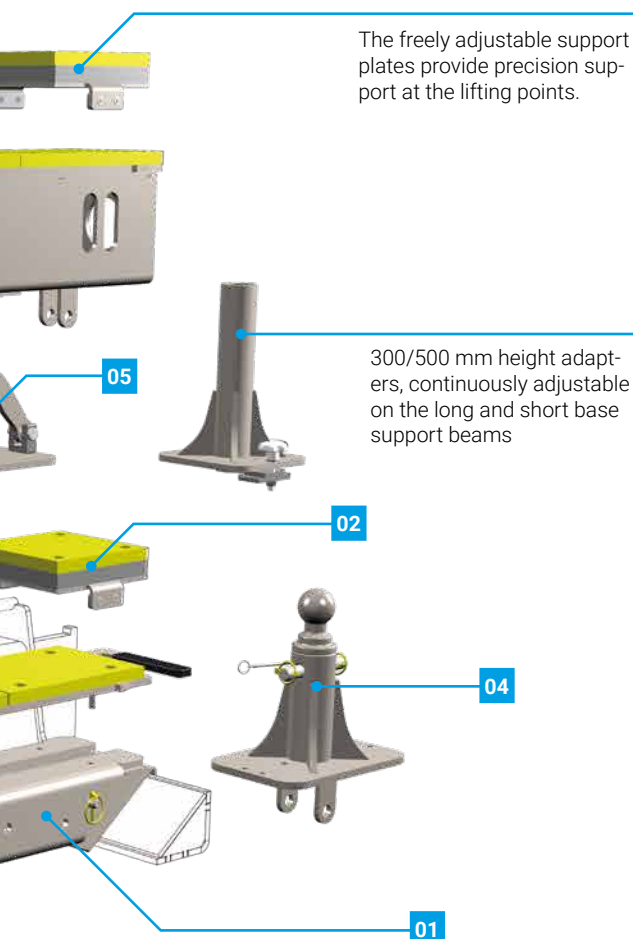


LONG BASE SUPPORT BEAM

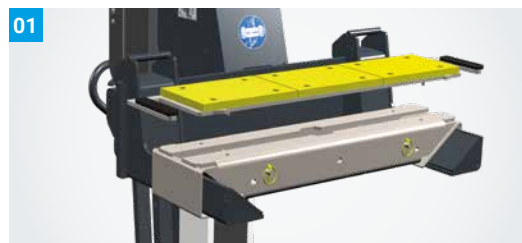

Long base support beam (TS 8.5 L)


For front and rear lifting. Load capacity 8.5 t, (L x W x H) 940 x 230 x 140 mm

Long support plate (L x W x H) 910 x 200 x 30 mm, incl. rubber pad

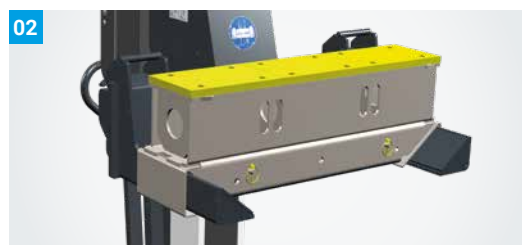

Standard extension support beam

Load capacity 8.5 t, (L x W x H) 900 x 200 x 200 mm, incl. rubber pad

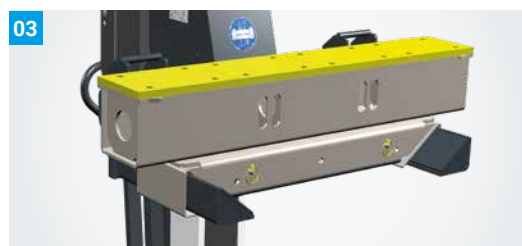

Long extension support beam


Load capacity 8.5 t, (L x W x H) 1,200 x 200 x 200 mm, incl. rubber pad

ADJUSTMENT RANGE OF HEIGHT ADAPTERS






THE TRANSPORT TROLLEY

ORGANISED AND CLOSE AT HAND

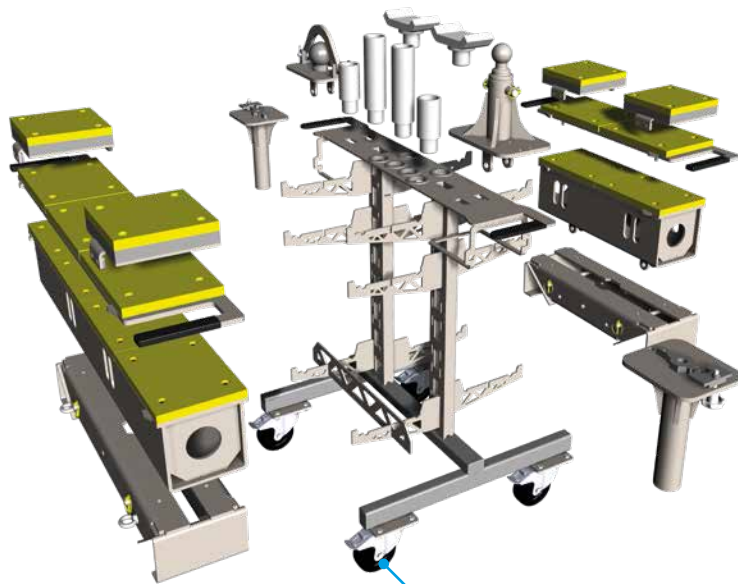

Light and freely movable thanks to castor wheels

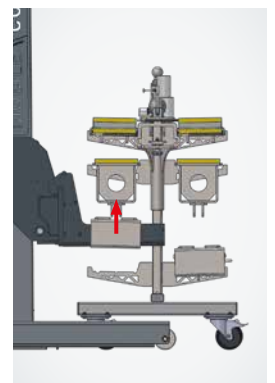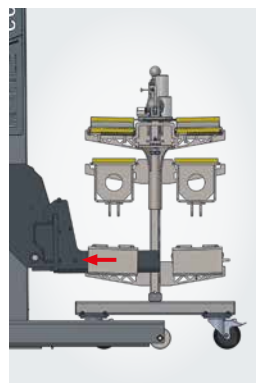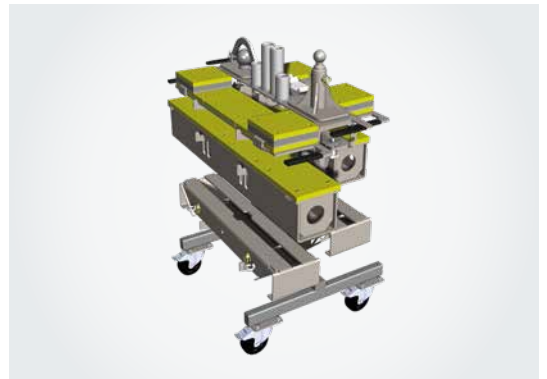

Support beams can be picked up directly from the trolley using the mobile column lift.

ATTACHMENTS AND EXTENSIONS (SELECTION)



Slim support plate, galvanised, model SP 20, support dimension 100 mm, W = 80 mm (2 pieces)



Fork attachment, galvanised, e.g. for military vehicles (2 pieces)



Plug-in lift extension, L = 100 mm, model ZS 100/45 (2 pieces)




Plug-in lift extension, L = 200 mm, model ZS 200/45 (2 pieces)



Pin for towing eye, galvanised, for lifting trailers at the drawbar, Ø = 35 mm



MAHA SE & Co. KG
Hoyen 20
87490 Haldenwang
Germany



maha.de